

07400.EA TIMED TAP FOR WASHBASIN WITH SECURITY PUSH AND 'ECO' WATER FLOW

GENERAL DATA



- Cold/hot timed water tap for washbasin with security push.
- Suitable for applications in prisons, police stations or any other place where vandal-proof faucets are required.
- Optimum relationship between comfort of use and ecology.
- Model for installation in washbasin or countertop.
- Operation with push button which acts when user releases pressure over push button. With this system unnecessary water flow is avoided.
- Interchangeable cartridge that includes the timed mechanism.
- Robust construction in chromed brass.
- Water flow at 3 bar: 3 l/min.
- Timed to 7±3 seconds.
- Elements of subjectation included.


TECHNICAL DATA

- Material: CW617N brass chrome body.
- Cartridge material: CW617N chrome-plated brass push button + plastic components in POM.
- Chrome under standard EN248.
- Cartridge thread dimensions: M 28 x 1.5 mm.
- Operation with push button which acts when user releases pressure over push button.
- Flow at 3 bar: 3 l/min.
- Operation time: 7±3 s according to the UNE-EN 8016.
- T^a maximum 85 °C.
- T^a maximum recommended 60 °C.
- Maximum pressure: 5 bar.
- Minimum pressure: 0.5 bar.
- Recommended pressure: 3 bar.
- Neoperl® exchangeable aerator M 24 x 1 mm with flow limiter.
- Plastic particle filter included.

SUGGESTED TEXT FOR PRESCRIPTION

Cold/hot timed water tap for washbasin NOFER 07400.EA with security push button for installation on countertop and 'ECO' water flow. It assembles a self-closing cartridge timed to 7±3 s made in chrome plated brass plus plastic components in POM. The tap operates unlike conventional models. It is necessary to press and after release the button then the water starts to flow out. This avoids unnecessary water expenses due to vandalism actions. Suitable for use in police stations or penitentiary institutions where vandal-proof faucets are required. The body is also made of chromed cast brass. Fixed spout with replaceable Neoperl® M24 x 1 mm aerator and flow restrictor. Flow rate of 3 l/min with 3 bars of dynamic pressure. Includes filter and all accessories for installation. Dimensions: 118.5 mm height x 136.9 mm width. Manufactured by NOFER, S.L. – Avda. de la Fama, 118 - c.p: 08940 Cornellà de Llobregat - Barcelona.

TECHNICAL DRAWING

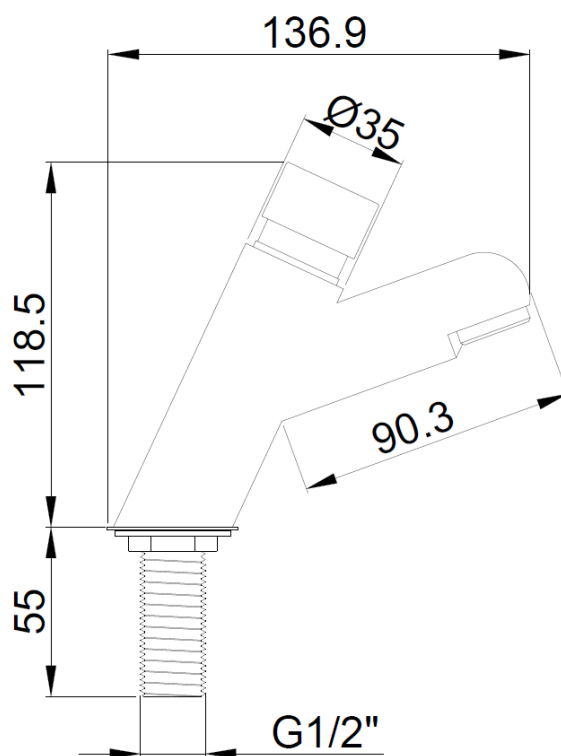

SECURITY OPERATION

