

### **AUTOMATIC HAND DRYER**

🖁 01871.PK

### Automatic hand dryer

- · Hand dryer with laser sensor.
- · Model for mounting on the surface.
- · Housing with pink painted front. Also available in other colors.
- · With HEPA filter ZeroSmell ® technology.
- They are shown with 2 serial fronts (white + color) and 2 output disks (Multi-jet and Blade).
- · Configurable in two types of power: Turbo or Eco.
- · Suitable for collectivities and places of high frequency of use.
- Robust, anti-vandalism and safe because it is built without sharp edges or other dangerous elements.



#### Blade air outlet



SUGGESTED TEXT FOR PRESCRIPTION

NOFER hand dryer, powered by an laser sensor, 900 W or 700 W

power. Speed motor 30000 r.p.m. front cover color pink.

Dimensions: 277 height x 164 width x 177 depth (mm).

Multi-jet air outlet



#### **TECHNICAL DATA**

- · Housing made of several pieces of fire retardant ABS. front painted pink.
- Electronic infrared sensor that stops the hand dryer when the hands are removed from the detection field.
- Exit temperature of air to ambient temperature. It does not have electrical resistance.
- · Long-life brush motors: 300000 cycles.
- Dryer speed motor: 30000 r.p.m.
- · Multi-jet air outlet with acoustic damping system avoids noise caused by the air outlet.
- · Blade air outlet is designed for quick and effective drying.
- · Power in Turbo mode: 900 W. Eco mode: 700 W.
- · Voltage/Frequency: 220-240 V 50/60 Hz.
- · Sensor range: 0-20 cm.
- Consumption in turbo mode: 4 A. Eco mode: 3,2 A.
- · Sound level at 2 meters: 65 dBA.
- · Protection index: IP22.
- · Dimensions: 277 height x 164 width x 177 depth (mm).
- · Total weight: 3 kg.
- Function: place your hands under the appliance. The hand dryer activates automatically, remaining in operation while the hands are inside the field of the sensor. The appliance switches off after a few seconds of removing them.
- · Cleaning: cleaning is recommended with a cotton cloth slightly moistened is a soapy solution. Then, dry.
- · Turbo-Blade estimated drying time: 6-8 seconds.
- · Turbo-Multijet estimated drying time: 8-10 seconds.
- · Eco-Blade estimated drying time: 8-10 seconds.
- · Eco-Multijet estimated drying time: 10-12 seconds.



NOFER S.L. Avenida de la fama, 118 08940 · Cornellà de Llobregat (Barcelona) Tel +34 934 742 423 · Fax +34 934 743 548 nofer@nofer.com · www.nofer.com











01600.S









# Automatic hand dryer

# TECHNICAL DRAWING



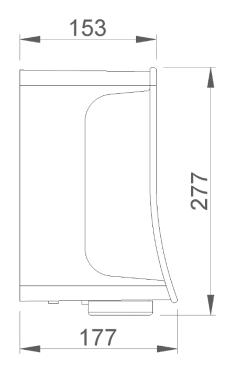

DIMENSIONS IN mm



NOFER S.L. Avenida de la fama, 118 08940 · Cornellà de Llobregat (Barcelona) Tel +34 934 742 423 · Fax +34 934 743 548 nofer@nofer.com · www.nofer.com