



赏 01902.GD

Set with hand dryer, soap dispenser and faucet

- Countertop set with hand dryer, soap dispenser and faucet with electronic sensor.
- Anodized aluminum set, gold finished. Also available in silver finish (NOFER 01902.S), titanium finish (NOFER 01902.T) and black finish (NOFER 01902.BK).
- · Robust, anti-vandalism and safe to be built without sharp edges or other dangerous elements.
- · Durability and resistance to corrosion.
- · Suitable for collectives and places of high frequency of use.
- In accordance with European safety directives (EC).



SUGGESTED TEXT FOR PRESCRIPTION

NOFER countertop set with hand dryer, soap dispenser and tap,

Motor speed 32000 r.p.m. Faucet, soap dispenser and hand dryer

with electronic sensor. Dimensions: 422 height x 230 width x 283

made of anodized aluminum, gold finish. Total power 1200 W.

TECHNICAL DATA

- Housing made of a single piece of anodized aluminum gold finish 1,2 mm thickness.
- Electronic infrared sensor for the hand dryer/ soap dish/faucet when the hands are removed from the detection field.
- Dryer speed motor: 32000 r.p.m.
- · Motor power: 1200 W.
- · Voltage/Frequency: 220-240 V 50/60 Hz.
- · Electrical insulation: Class II.
- · Consumption: 5,3 A.
- Sound level at 2 meters: 65 dBA.
- · Protection index: IP52.
- · Overall dimensions: 422 height x 230 width x 283 depth (mm).
- · Faucet dimensions: 317,5 height x 230 width x 268 depth (mm).
- · Hand dryers dimensions: 180 height x 322 width x 180 depth (mm).
- · Soap dish dimensions: 120 height x 322 width x 120 depth (mm).
- Faucet weight: 2,5 kg.
- · Hand dryer weight: 3,1 kg.
- Soap dish weight: 0,9 kg.
- · Plastic soap dish inside.
- Capacity: 2 liters.
- · Soap dose: 1-4 cc (electronic regulation).
- · Water consumption: 3,7 l/m (3 bar).
- Function: place your hands under the appliance. There are three separated areas: the faucet at the front, the soap dispenser at the right side and the hand dryer outlets at left and right sides. The faucet, soap dispenser and hand dryer will start automatically in each area and it continues working while the hands are within the active range. The device switches off after a few seconds of removal.
- · Maintenance: we recommend cleaning with a cotton cloth slightly moistened with a soap solution. Then rinse and dry it.

01902.S

· Estimated drying time: 14-15 seconds.




depth (mm).

NOFER S.L. Avenida de la fama, 118 08940 · Cornellà de Llobregat (Barcelona) Tel +34 934 742 423 · Fax +34 934 743 548 nofer@nofer.com · www.nofer.com



Set with hand dryer, soap dispenser and faucet

TECHNICAL DRAWING

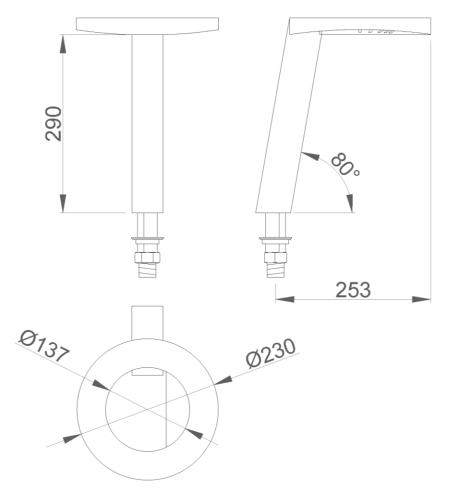

DIMENSIONS IN mm



NOFER S.L. Nort E. 3.L.

Nort E. 3.L.

North Avenida de la fama, 118

08940 · Cornellà de Llobregat (Barcelona)

Tel +34 934 742 423 · Fax +34 934 743 548

nofer@nofer.com · www.nofer.com