

**Foldable hair dryer**


- Ergonomically hair dryer, surface mounted.
- Two speeds hair dryer.
- Security switch ON/OFF.
- Selector to adjust the flow (0 – 1 – 2).
- Foldable to save storage space.
- Cold air push button.
- Suitable for hotels.
- Super mute and long life motor.

**TECHNICAL DATA**

- Material: ABS.
- Color: white
- Dimensions: 230 height x 80 width x 180 depth (mm).
- Cable length: 1,6 m.
- Weight: 0,85 Kg.
- Voltage: 220 V – 240 V ~
- Frequency: (50-60 Hz).
- Power: 1600 W.
- Power consumption: 6,9 A.
- Electrical insulation: Class II
- Electrical protection: IP20
- Airspeed: 50 km / h
- Effective flow: 1200 l / min.
- Noise level at 2m: 60 dBA.
- Air temperature (20°C ambient): 63°C to 10 cm
- Overheating protection system.

**SUGGESTED TEXT FOR PRESCRIPTION**

Foldable hair dryer NOFER, hot and cold air. Equipped with a selector to adjust the flow and a push button for cold air. Total power: 1600 W.



NOFER S.L.  
 Avenida de la fama, 118  
 08940 · Cornellà de Llobregat (Barcelona)  
 Tel +34 934 742 423 · Fax +34 934 743 548  
 export@nofer.com · www.nofer.com

Related Products



02055.W



02055.G



02057



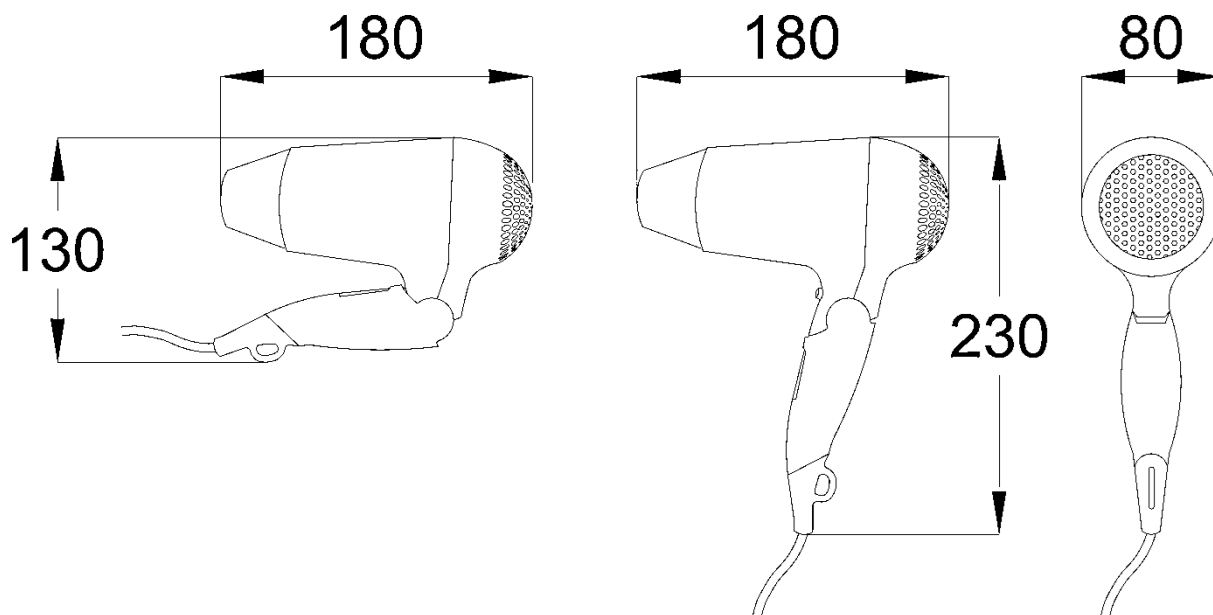
02059



02200.S



02200.W

**TECHNICAL DRAWING**


Dimensions in mm

**INSTALATION**

To install the foldable hair dryer, place the support ring in the place where you want to install it and use it as a plate, mark the position of the holes in the wall. Remove the ring and drill holes using a 6 mm drill bit. Insert the plugs into the holes, position the ring in position and thread the screws provided with the appliance. Adjust the vandal-proof plugs to the holes in the base. Connect the plug cable to a power base. From this moment the dryer can be housed in the ring provided for that purpose and is arranged to be used. The installation should be as shown in fig-0. The recommended installation height is 130-150 cm to the floor, or 110 cm in case of adapted toilets.

