

Temporized flushometer

- Temporized WC flushometer for vertical wall mounting.
- Push button operation.
- Durability and resistance against rust.
- Suitable for public and continuous use.
- Easy to clean.




TECHNICAL DATA

- Sturdy construction of chrome-plated brass.
- Minimum dynamic water pressure: 1 bar.
- Dimensions : 135 mm height x 70 mm depth
- Flush volume: 6 to 9 liters (adjustable).
- Shut-off valve and built-in flow control.
- Chrome-plated escutcheon included.
- Water inlet 3/4 " G male thread.
- Outlet for Ø 26 – 28 mm pipe.
- Flow rate: 1,5 l/s (1 bar), 2,25 l/s (2 bar), 2,75 l/s (3 bar).

SUGGESTED TEXT FOR PRESCRIPTION

Temporized WC flushometer for vertical wall mounting NOFER or similar, chrome-plated brass. Wall escutcheon included. Water inlet 3/4 " G male thread and outlet for Ø 26 – 28 mm pipe. Dimensions : 135 mm height x 70 mm depth.

TECHNICAL DRAWING

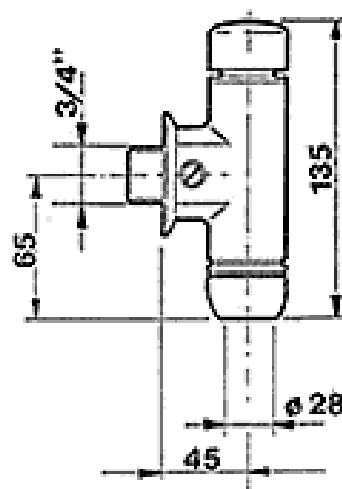

DIMENSIONS IN mm.



NOFER S.L.  
 Avenida de la fama, 118  
 08940 · Cornellà de Llobregat (Barcelona)  
 Tel +34 934 742 423 · Fax +34 934 743 548  
 export@nofer.com · www.nofer.com

Related Products



07079



07080



07081



07082



07083



07085