

Wall mounted temporized flushometer

- Temporized flushometer.
- Suitable for wall mounted installation.
- Push button opening.
- Durability and resistance against use and corrosion.
- Designed for public areas and continuous use.
- Easy to clean.




TECHNICAL DATA

- Sturdy construction of chrome-plated brass.
- Minimum dynamic water pressure: 1 bar.
- Flush volume: 6 to 9 liters.
- Chrome-plated escutcheon included.
- Water inlet 3/4 " G male thread.
- Outlet for Ø 26 – 28 mm pipe.
- Flow rate: 1,5 l/s (1 bar), 2,25 l/s (2 bar), 2,75 l/s (3 bar).

SUGGESTED TEXT FOR PRESCRIPTION

Temporized WC flushometer for vertical wall mounting NOFER or similar, chrome-plated brass. Wall escutcheon included. Water inlet 3/4 " G male thread and outlet for Ø 26 – 28 mm pipe.

TECHNICAL DRAWING

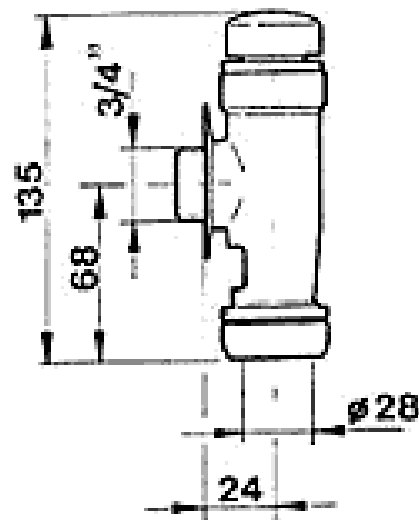

DIMENSIONS IN mm



NOFER S.L.  
 Avenida de la fama, 118  
 08940 · Cornellà de Llobregat (Barcelona)  
 Tel +34 934 742 423 · Fax +34 934 743 548  
 export@nofer.com · www.nofer.com

Related Products



07078



07080



07081



07082



07083



07086