

Chlorine filter housing

- Housing for chlorine filters connected to the water network.
- Suitable for low quality water. Removes up to 50% chlorine and impurities.




TECHNICAL DATA

- Head in blue polypropylene and housing in translucent SAN. Metal air purge valve.
- Maximum pressure: 8 bar.
- Operating temperature: between 0°C and 45°C.
- Requires cartridge NOFER 10007.
- Dimensions: 350 mm high, Ø 120 mm.

SUGGESTED TEXT FOR PRESCRIPTION

Housing for chlorine filter NOFER or similar. Dimensions: 350 mm high, Ø 120 mm. Requires cartridge NOFER 10007.

TECHNICAL DRAWING

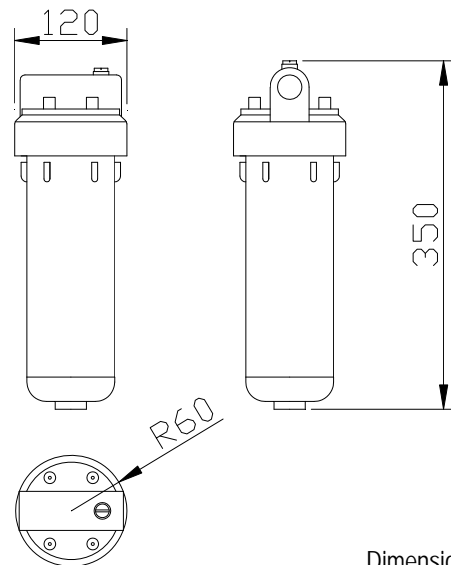

Dimensions in mm



NOFER S.L.
 Avenida de la fama, 118
 08940 · Cornellà de Llobregat (Barcelona)
 Tel +34 934 742 423 · Fax +34 934 743 548
 nofer@nofer.com · www.nofer.com

Related Products



10007



10023



10080



10008



10071



10002